

## MD

### Self-Contained, Multi-Deck Medium Temperature Merchandiser

---

#### Advanced Design

- Small footprint, high volume
- Full front accessibility to products
- Plexiglass ends for side visibility
- White exterior upper body and black lower base section
- All white powder coated paint
- Standard red front bumper
- All models ship from the factory with power cord connected NEMA 6-15 plugs

#### Merchandising with Style

- Four 14-inch shelves adjustable to various positions
- Shelves can be slanted for display appeal
- Large bottom deck easily displays large, bulk impulse products
- Upper canopy light provides full illumination of case interior
- Built-in shelf PTM assists with unit pricing


#### Smart Construction

- Durable molded plastic case ends that resist scratching and dents
- CFC-free insulation
- Off time defrost ensures maximum operating efficiency
- Built-in electric condensate pan eliminates the need for external floor drains
- Integrated night cover
- Flow through panels provide maximum condensing unit ventilation




# Self-Contained, Multi-Deck Merchandiser for Beverage, Dairy, Deli, and Produce Applications

## MD-10 and MD-14 - Self-Contained, Multi-Deck Merchandiser

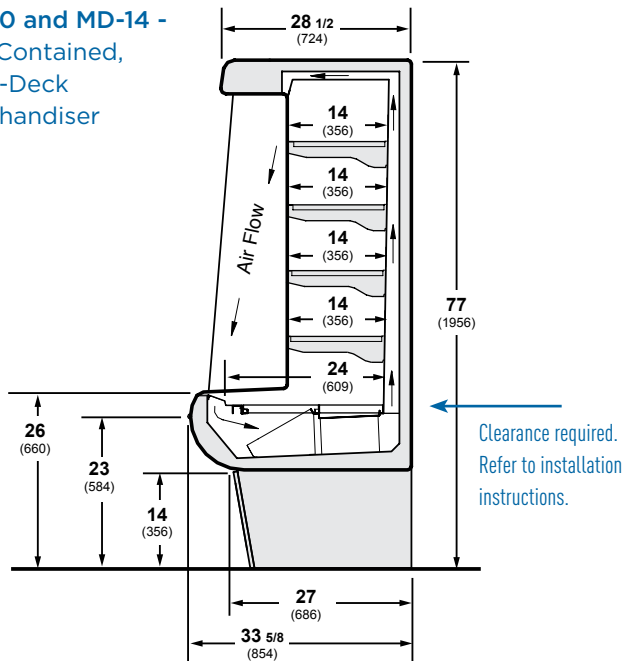

### Plan View

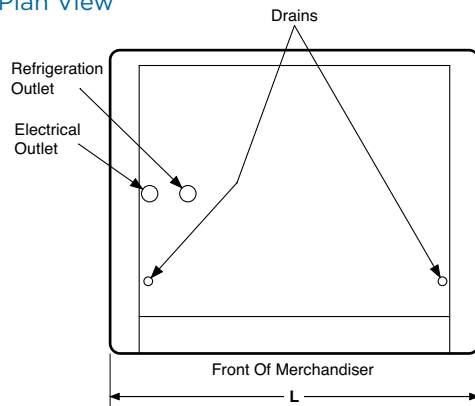

### All Models



### Standard Features.

- Color Exterior	White
- Color Exterior Base	Black
- Color Interior	White
- Bumper	Red
- Shelves	(4) at 14"
- Shelf Lighting	No
- Canopy Lighting	Yes
- End Panel	View
- Hardwired	No
- PTM	Yes
- NSF	Type I
- Door(s)	No
- Integrated Night Cover	Yes
- Air Discharge	Front
- Insulation	CFC-Free
- Casters	No
- Leg Levelers	Yes

### Innovative Refrigeration.

- Electronic controller maintains even case temperatures.

### Optional Accessories.

- Extra mezzanine shelf.
- Product stop.

### Specifications

Model	Exterior Dimensions			Nom. HP	Refrig.	Volts	Electrical		NEMA Plug	Approx. Ship Wt. (lbs)
	L	D	H				Run Amps	Fuse Amps		
MD-10	39"	33-5/8"	77"	1-1/4	R-134a	208-230/60/1	10.3	15	6-15P	368
MD-14	52"	33-5/8"	77"	1-1/4	R-134a	208-230/60/1	12.0	15	6-15P	467

MD-10 Refrigeration load - 4813 BTU/h @ 20° F evaporation temperature and 110° F condensing temperature. AC load - 6201 BTU/h

MD-14 Refrigeration load - 7376 BTU/h @ 20° F evaporation temperature and 110° F condensing temperature. AC load - 9439 BTU/h

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75° F and 55% R.H. Case is designed for holding pre-frozen product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit [www.hussmann.com](http://www.hussmann.com).



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.



# HUSSMANN®

**Hussmann Corporation**  
12999 St. Charles Rock Rd.  
Bridgeton, MO 63044-2483  
Ph: 314.291.2000

[www.hussmann.com](http://www.hussmann.com)